erbe
power your performance.



Instruments and accessories

for vessel sealing

Important notes

The authors and Erbe Elektromedizin GmbH have taken the greatest possible care while compiling the catalogue with electrosurgical accessories. Nevertheless, it is impossible to exclude the possibility that errors may be contained herein.

The information and recommendations given here may not be construed as constituting any basis for any claims against Erbe Elektromedizin GmbH. Should legal regulations stipulate liability, such liability shall be limited to intentional misconduct or gross negligence.

The data on the use of instruments is based on clinical experience. Medical science is subject to a process of permanent change based on research and clinical experience. Therefore the products are subject to alterations in design and technique. Because of production tolerances dimensions in the catalogue may marginally differ.

Further product information

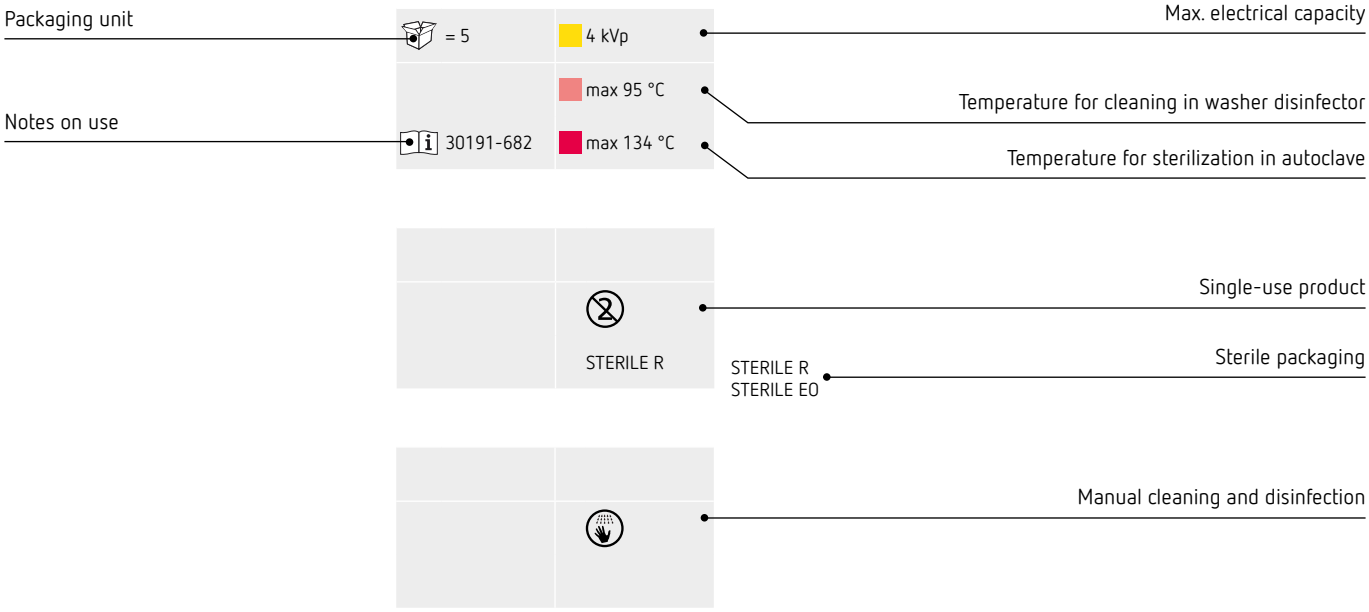

Please read carefully the corresponding notes on use before using any instrument.

Contents

Vessel sealing

Instruments and accessories

04 TriSect rapide
04 BiClamp knife
05 BiClamp
13 BiClamp LAP forceps
17 BiClamp E LAP forceps
19 Accessories for treatment for BiClamp LAP and BiClamp E LAP forceps

TriSect rapide

TriSect rapide 140, single-use, bent 17 mm, shaft length 140 mm

with connecting cable 4 m and MF-2 plug



No. 21195-400	
= 5	0.22 kVp
31195-056	STERILE EO

TriSect rapide 200, single-use, bent 17 mm, shaft length 200 mm

with connecting cable 4 m and MF-2 plug



No. 21195-401	
= 5	0.22 kVp
31195-056	STERILE EO

TriSect rapide 350, single-use, bent 17 mm, shaft length 350 mm

with connecting cable 4 m and MF-2 plug



No. 21195-402	
= 5	0.22 kVp
31195-056	STERILE EO

TriSect rapide 450, single-use, bent 17 mm, shaft length 450 mm

with connecting cable 4 m and MF-2 plug



No. 21195-403	
= 5	0.22 kVp
31195-056	STERILE EO

BiClamp knife

BiClamp knife 220, single-use, bent 36 mm, shaft length 220 mm

with connecting cable 4 m and MF-2 plug



No. 20195-315	
= 5	0.25 kVp
30195-400	STERILE EO

BiClamp



100 %

150 mm

200 mm

BiClamp



210 mm

260 mm

BiClamp



100 %

270 mm

280 mm

BiClamp

BiClamp



No.	
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

Product type	Length	Shape	Jaws	No.
BiClamp 150 C 	150 mm	bent 23°	smooth	20195-221 21195-221
BiClamp 190 C 	190 mm	bent 23°	smooth	21195-190
BiClamp 201 T 	200 mm	bent 18°	smooth	20195-202 21195-202
BiClamp 210 	210 mm	bent 25°	corrugated	20195-200 21195-200
BiClamp 271 T 	270 mm	bent 18°	smooth	20195-203 21195-203
BiClamp 280 	280 mm	bent 25°	smooth	20195-280 21195-280

100 %

BiClamp

BiClamp 150 C, bent 23°, smooth, length 150 mm

with connecting cable 4 m and MF plug, with ceramic coating, e.g. for thyroidectomy





	No. 20195-221
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 201 T, bent 18°, smooth, length 200 mm

with connecting cable 4 m and MF plug, with thermal insulation, for open surgical procedures, e.g. intestinal surgery





	No. 20195-202
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 210, bent 25°, smooth, length 210 mm

with connecting cable 4 m and MF plug, with corrugated surfaces, e.g. for vaginal hysterectomy





	No. 20195-200
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp

BiClamp 271 T, bent 18°, smooth, length 270 mm

with connecting cable 4 m and MF plug, with thermal insulation, for open surgical procedures, e.g. intestinal surgery



No. 20195-203	
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 280, bent 25°, smooth, length 280 mm

with connecting cable 4 m and MF plug. e.g. for open cystectomy or prostatectomy



No. 20195-280	
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp

BiClamp 150 C, MF-2, bent 23°, smooth, length 150 mm

with connecting cable 4 m and MF-2 plug, with ceramic coating, e.g. for thyroidectomy





	No. 21195-221
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 190 C, MF-2, bent 23°, smooth, length 190 mm

with connecting cable 4 m and MF-2 plug, with ceramic coating, e.g. for thyroidectomy





	No. 21195-190
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 201 T, MF-2, bent 18°, smooth, length 200 mm

with connecting cable 4 m and MF-2 plug, with thermal insulation,
for open surgical procedures, e.g. intestinal surgery





	No. 21195-202
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 210, MF-2, bent 25°, smooth, length 210 mm

with connecting cable 4 m and MF-2 plug, with corrugated surfaces,
e.g. for vaginal hysterectomy





	No. 21195-200
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp

BiClamp 271 T, MF-2, bent 18°, smooth, length 270 mm

with connecting cable 4 m and MF-2 plug, with thermal insulation,
for open surgical procedures, e.g. intestinal surgery



	No. 21195-203
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

BiClamp 280, MF-2, bent 25°, smooth, length 280 mm

with connecting cable 4 m and MF-2 plug,
e.g. for open cystectomy or prostatectomy



	No. 21195-280
= 1	0.25 kVp
	max 95 °C
31195-003	max 138 °C

Adapters	Piece	No.
Adapter, MF-socket, MF-2-plug for VIO 300 D 	1	20183-100
Adapter, MF-2 / MF-U-socket, MF-plug for VIO 3 and VIO 300 D 	1	20183-101

BiClamp LAP forceps

BiClamp LAP forceps, Maryland, semi-deep ribbed, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF plug, complete instrument



No. 20195-134	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, Maryland, smooth, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF plug, complete instrument



No. 20195-135	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, fenestrated, semi-deep, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF plug, complete instrument



No. 20195-136	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, fenestrated, smooth, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF plug, complete instrument



No. 20195-137	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps

BiClamp LAP forceps, Kelly, semi-deep, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-228	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp 110, smooth, shaft ø 5 mm, non-adhesive coating, length 110 mm

with connecting cable 4 m and MF-plug, complete instrument,
e.g. for minimally invasive thyroidectomy (MIVAT)



No. 20195-230	
= 1	0.25 kVp
	max 95 °C
30195-096	max 138 °C

BiClamp LAP forceps

BiClamp LAP forceps, Maryland, MF-2, semi-deep ribbed, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF-2 plug, complete instrument



No. 21195-134	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, Maryland, MF-2, smooth, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF-2 plug, complete instrument



No. 21195-135	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, fenestrated, MF-2, semi-deep, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF-2 plug, complete instrument



No. 21195-136	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, fenestrated, MF-2, smooth, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF-2 plug, complete instrument



No. 21195-137	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps, Kelly, MF-2, semi-deep, shaft ø 5 mm, non-adhesive coating, length 340 mm

with connecting cable 4 m and MF-2 plug, complete instrument



No. 21195-228	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp LAP forceps

BiClamp 110, MF-2, smooth, shaft ø 5 mm, non-adhesive coating, length 110 mm

with connecting cable 4 m and MF-2 plug, complete instrument,
e.g. for minimally invasive thyroidectomy (MIVAT)





No. 21195-230	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

Single components	Piece	No.
Insert for BiClamp LAP forceps, Kelly, shaft ø 5 mm, length 340 mm (for 20195-228) 	1	20195-236
Insert for BiClamp LAP forceps, Maryland, semi-deep ribbed, shaft ø 5 mm, length 340 mm (for 20195-134) 	1	20195-146
Insert for BiClamp LAP forceps, Maryland, smooth, shaft ø 5 mm, length 340 mm (for 20195-135) 	1	20195-147
Insert for BiClamp LAP forceps, fenestrated, semi-deep, shaft ø 5 mm, length 340 mm (for 20195-136) 	1	20195-148
Insert for BiClamp LAP forceps, fenestrated, smooth, shaft ø 5 mm, length 340 mm (for 20195-137) 	1	20195-149
Insert for BiClamp 110, smooth, shaft ø 5 mm, length 110 mm (for 20195-230) 	1	20195-232
Shaft tube for bipolar LAP forceps and BiClamp LAP forceps 	1	20195-141
Shaft tube for BiClamp 110, ø 5 mm, length 110 mm (for 20195-230) 	1	20195-234
Handle for BiClamp LAP forceps and BiClamp 110, with connecting cable 4 m and MF plug 	1	20195-145
Handle for BiClamp LAP forceps and BiClamp 110, with connecting cable 4 m and MF-2 plug 	1	21195-145

Adapters	Piece	No.
Adapter, MF-socket, MF-2-plug for VIO 300 D 	1	20183-100
Adapter, MF-2/MF-U-socket, MF-plug for VIO 3 and VIO 300 D 	1	20183-101

BiClamp E LAP forceps

BiClamp E LAP forceps, Maryland, semi-deep, shaft ø 5 mm, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-246	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, Maryland, smooth, shaft ø 5 mm, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-247	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, fenestrated, semi-deep, ø 5 mm, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-248	
= 1	0.25 kVp
	max 95 °C
30195-096	max 138 °C

BiClamp E LAP forceps, fenestrated, smooth, shaft ø 5 mm, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-249	
= 1	0.25 kVp
	max 95 °C
30195-096	max 138 °C

BiClamp E LAP forceps, Kelly, semi-deep, shaft ø 5 mm, length 340 mm

with connecting cable 4 m and MF plug



No. 20195-229	
	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps

BiClamp E LAP forceps, Maryland, MF-2, semi-deep, shaft ø 5 mm, length 340 mm

with connecting cable 4 m and MF-2 plug



No. 21195-246	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, Maryland, MF-2, smooth, shaft Ø 5 mm, length 340 mm

with connecting cable 4 m and MF-2 plug



No. 21195-247	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, fenestrated, MF-2, semi-deep, ø 5 mm, length 340 mm

with connecting cable 4 m and MF-2 plug



No. 21195-248	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, fenestrated, MF-2, smooth, shaft Ø 5 mm, length 340 mm

with connecting cable 4 m and MF-2 plug



No. 21195-249	
= 1	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps, Kelly, MF-2, semi-deep, shaft Ø 5 mm, length 340 mm

with connecting cable 4 m and MF-2 plug



No. 21195-229	
	0.25 kVp
	max 95 °C
30195-119	max 138 °C

BiClamp E LAP forceps

Single components	Piece	No.
Insert for BiClamp E LAP forceps, Kelly, shaft ø 5 mm, length 340 mm (for 20195-229, 21195-229) 	1	20195-236
Insert for BiClamp E LAP forceps, Maryland, semi-deep ribbed, shaft ø 5 mm, length 340 mm (for 20195-246, 21195-246) 	1	20195-146
Insert for BiClamp E LAP forceps, Maryland, smooth, shaft ø 5 mm, length 340 mm (for 20195-247, 21195-247) 	1	20195-147
Insert for BiClamp E LAP forceps, fenestrated, semi-deep, shaft ø 5 mm, length 340 mm (for 20195-248, 21195-248) 	1	20195-148
Insert for BiClamp E LAP forceps, fenestrated, smooth, shaft ø 5 mm, length 340 mm (for 20195-249, 21195-249) 	1	20195-149
Shaft tube for BiClamp E LAP forceps, ø 5 mm, length 340 mm 	1	20195-241
Handle for BiClamp E LAP forceps, with connecting cable 4 m and MF plug (for 20195-246, 20195-247, 20195-248, 20195-249, 20195-229) 	1	20195-240
Handle for BiClamp E LAP forceps, with connecting cable 4 m and MF-2 plug (for 21195-246, 21195-247, 21195-248, 21195-249, 21195-229) 	1	21195-240

Adapters	Piece	No.
Adapter, MF-socket, MF-2-plug for VIO 300 D 	1	20183-100
Adapter, MF-2/MF-U-socket, MF-plug for VIO 3 and VIO 300 D 	1	20183-101

Accessories for treatment for BiClamp LAP and BiClamp E LAP forceps

Accessories for treatment	Piece	No.
Cleaning brush for suction channel max. ø 3.5 mm, length 650 mm, for manual cleaning and disinfection	1	20191-279
Irrigation tube for shaft tube with Luer Lock connector, length 500 mm, for LAP instruments, for cleaning and disinfection by machine 	1	20195-201

Important information

The information, recommendations and other details contained in this medium ("information") reflect our state of knowledge and the state of the art in science and technology at the time the medium was created. The information is of a general nature, non-binding and intended solely for general information purposes; it does not constitute instructions for use.

The information and recommendations contained in this medium do not create any legal obligations on the part of Erbe Elektromedizin GmbH and its affiliated companies ("Erbe") or any other claims against Erbe. The information does not constitute any guarantees or other information on the nature of the product; such information requires an express contractual agreement with Erbe in each individual case.

Erbe is not liable for any kind of damage resulting from following the information on this medium, regardless of any legal grounds for liability.

Every user of an Erbe product is responsible for testing the respective Erbe product in advance with regard to its properties and its suitability for the intended type of use or purpose. Suitable type of use of the respective Erbe product can be found in the instructions for use for the respective Erbe product. The user is obliged to ascertain whether the instructions for use available to him/her correspond to the current status of the specific Erbe product. Devices may only be used in accordance with the instructions for use.

Information on settings, application sites, application duration and use of the respective Erbe product is based on the clinical experience of individual centers, physicians and clinical literature independent of Erbe as well as post market surveillance and empirical evidence. They constitute reference values, or Experienced Starting Settings, which must be checked by the user to ensure that they are suitable for the specifically planned application. Depending on the circumstances of a specific application, it may be necessary to deviate from the information provided. The user is responsible for checking this when using Erbe products. We wish to note that science and technology are subject to constant development as a result of research and clinical experience. Similarly, medicine and clinical application are constantly evolving as a result of research and technological development. This may also make it necessary for the user to deviate from the information provided on this medium.

This medium contains information about Erbe products that may not be approved/cleared in certain countries. The user of the respective Erbe product is obliged to inform himself/herself as to whether the Erbe product he/she is using is legally approved/cleared in his/her country and/or to what extent, if any, there are legal requirements for or restrictions on its use.

This medium is not intended for use in the USA.

Erbe Elektromedizin GmbH
Waldhoernlestrasse 17
72072 Tuebingen, Germany

Phone +49 7071 755-0
info@erbegroup.com
erbegroup.com

© Erbe Elektromedizin GmbH 2026 2026-10 85100-168 non-US only